

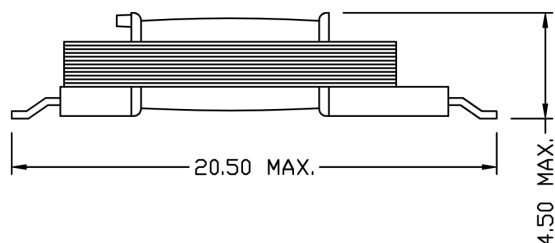
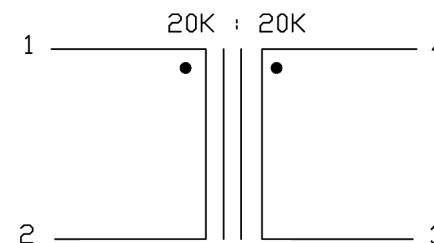


REACH & RoHS
COMPLIANT

REV.	ECN / DESCRIPTION	BY	DATE
A0	NEW	MQ.Cui	2023.03.02

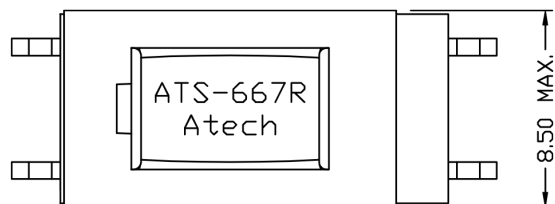

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-2 = 2.37 KOHM MAX.
PIN 4-3 = 2.82 KOHM MAX.
- INDUCTANCE PARALLEL (@250HZ, 0.5Vrms) : PIN 1-2 = 70H MIN.
- INSERTION LOSS (@1KHZ, 1Vrms, PIN 4-3 W/H 20KOHM) :
PIN 1-2 = 1.3dB ± 0.25dB
- FREQ. RESP. (@REF 1KHZ) : @300HZ = ±0.3dB
@4KHZ = ±0.3dB
- RETURN LOSS (@REF 20KOHM) : @300HZ = 18dB MIN.
@1KHZ = 18dB MIN.
@4KHZ = 18dB MIN.
- TURN RATIO (@12KHZ, 1Vrms) : PIN 1-2 : PIN 4-3 = 1 ± 1%
- HI-POT (@1250VAC, 1mA, 2SEC) : PIN 1-4
- RoHS COMPLIANT



苏州沃虎电子科技有限公司

Tel:4001048018 Http://www.wohu-tek.com

Part Number	Impedance PRI:SEC	Type&Size	Mounting	Hi-Pot (Vrms)	Inductance	Turns Ratio (Line:Device)	Dimension L/W/H(mm)
ATS-667R	20K:20K	EL-08	SMD(Low profile)	1250	70H Min	1:1	20.5/8.5/4.5