

产品承认书

SPECIFICATION FOR APPROVAL

客 户	晟雅泰
CUSTOMER:	
客 户 料 号	LP7008ANL
CUSTOMER P/N:	
料 号	SM24P02 G
JWD P/N:	
编 号	JWD-L-23092
SPEC NO.	
版 本	R0
REV:	
描 述	10G BASE-T
DESCRIPTION:	
	Laser Marking
环 保 符 合 项	☒ RoHS ☒ Reach ☒ HF ☐ 其他
ENVIRONMENTAL:	

CUSTOMER APPROVAL		COMPANY APPROVAL	
			
INSPECTED BY:		ISSUED BY:	Xie Li
CHECKED BY:		CHECKED BY:	Bob
APPROVED BY:		APPROVED BY:	Focus
APPROVED DATE:		ISSUED DATE:	2023/4/25

Please Return One Copy to Us After Approved,TKS! (承认后请回寄一份,谢谢)



四川经纬达科技集团有限公司

Sichuan Jingweida Technology Group Co., Ltd

地址: 绵阳高新区防震减灾产业园

ADD: Protecting Against and Mitigating Earthquake Disasters Industrial Park,
High-tech Zone, Mianyang, Sichuan 621000 CHINA.

TEL: +86-816-2561202 FAX: +86-816-2562518

E-MAIL: myjwd@myjwd.com

WEB: www.myjwd.com





四川经纬达科技集团有限公司

Sichuan Jingweida Technology Group Co., Ltd

C. ELECTRICAL SPECIFICATIONS @25°C

1. OCL: 120 uH Min @100KHz 0.1V
2. Leakage Inductance: 0.5uH Max @ 100KHz, 0.1V
3. DCR: 900mΩ Max
4. Turns Ratio: 1CT:1CT±5%
5. Insertion Loss: -1.2dB max @ 1~200 MHz
-1.5dB max @ 200~300 MHz
-2.0dB max @ 300~400 MHz
-3.0dB max @ 400~500 MHz
6. Return Loss: -18 dB Min @ 1~100 MHz
-16 dB Min @ 100~200 MHz
-12 dB Min @ 200~300 MHz
-10 dB Min @ 300~400 MHz
-8 dB Min @ 400~500 MHz
7. Cross Talk: -25 dB Typ @ 1-500 MHz
8. Common Mode Rejection: -25 dB Typ @ 1-500 MHz
9. Isolation Hipot: 1500VAC 1mA 60S
10. Operating temperature 0°C to +70°C
11. Storage temperature -40°C to +85°C



DESCRIPTION	JWD P/N	SPEC NO.	REV: R0
10G BASE-T	SM24P02 G	JWD-L-23092	PAGE: 3/5



四川经纬达科技集团有限公司

Sichuan Jingweida Technology Group Co., Ltd

D. PACKAGE INFORMATION

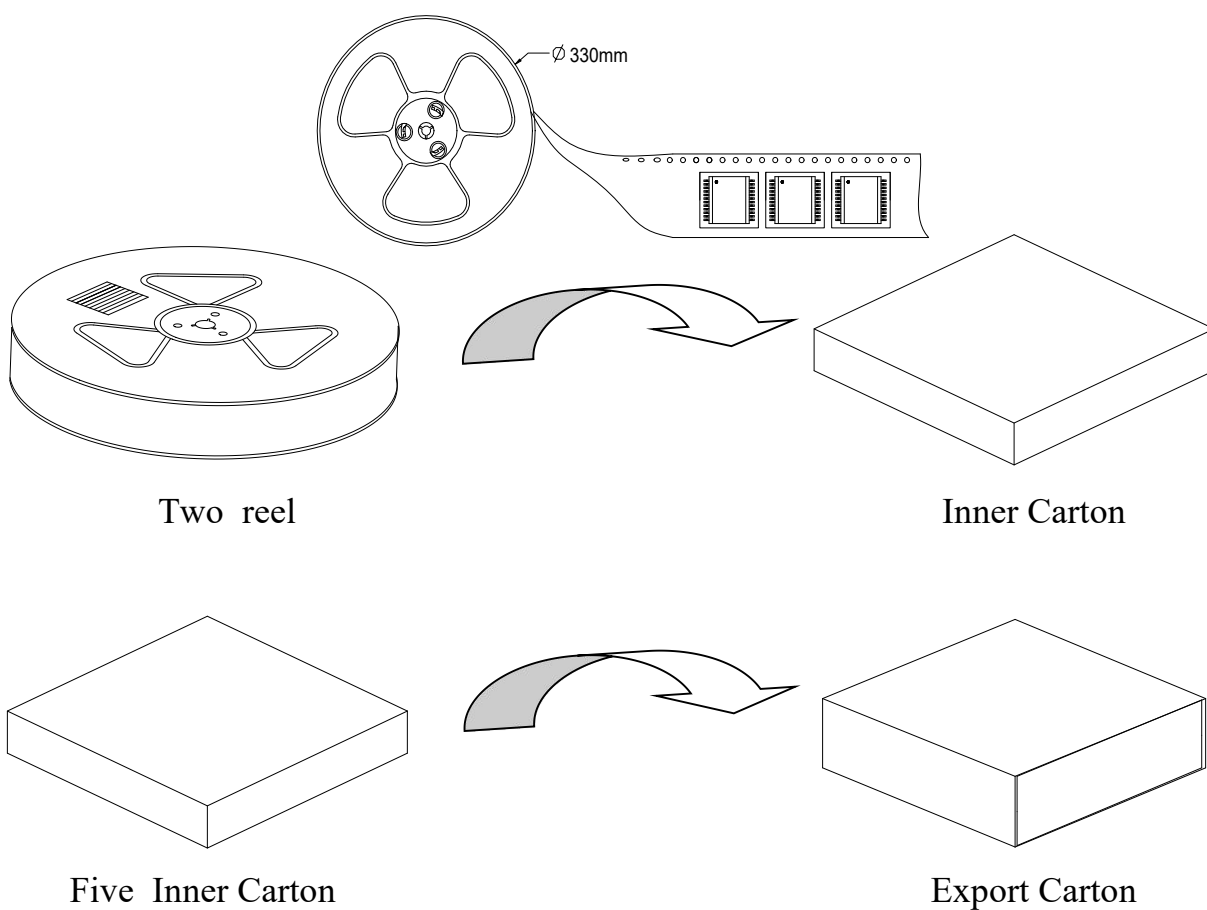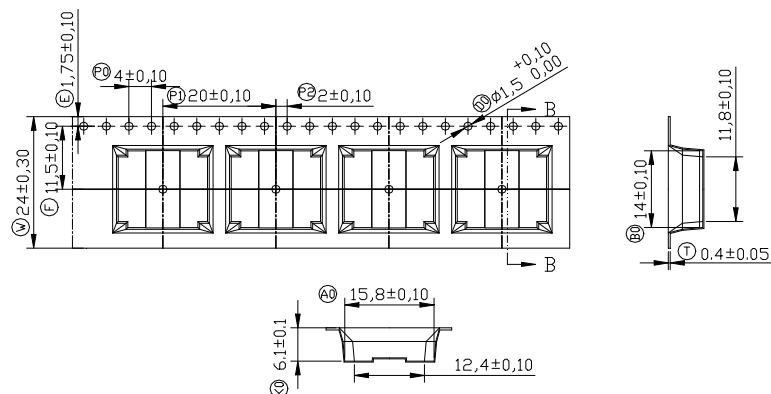

Package Quantity:

One Reel=450Pcs

One Inner Carton=450*2=900Pcs

One Export Carton=900*5=4500Pcs


DESCRIPTION	JWD P/N	SPEC NO.	REV: R0
10G BASE-T	SM24P02 G	JWD-L-23092	PAGE: 4/5



四川经纬达科技集团有限公司

Sichuan Jingweida Technology Group Co., Ltd

E. RECOMMEND REFLOW SOLDERING CURVE

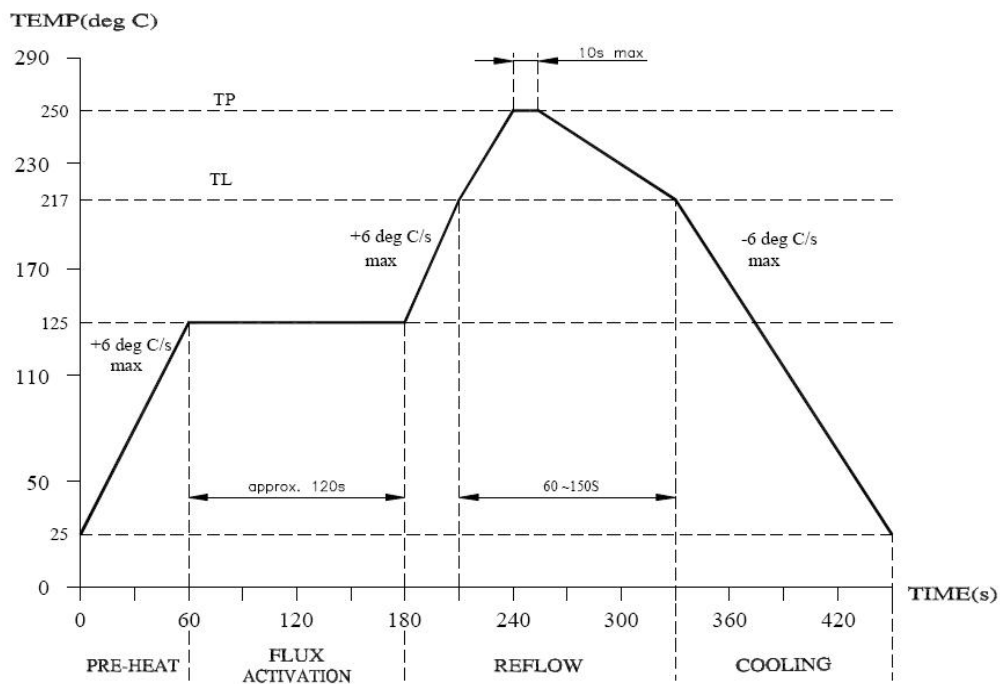

DESCRIPTION	JWD P/N	SPEC NO.	REV: R0
10G BASE-T	SM24P02 G	JWD-L-23092	PAGE: 5/5