

APPROVED SHEET

CUSTOMER: 晟雅泰

CUSTOMER P/N:

JWD P/N: SM24P01 G

REV: R0

DESCRIPTION: 10G BASE-T

Laser Marking

CUSTOMER APPROVAL		COMPANY APPROVAL	
			
INSPECTED BY:		ISSUED BY:	Katherine
CHECKED BY:		CHECKED BY:	Eason
APPROVED BY:		APPROVED BY:	Focus
APPROVED DATE:		ISSUED DATE:	2019-5-6

Please Return One Copy to Us After Approved,TKS! (承认后请回寄一份,谢谢)



四川经纬达科技集团有限公司

Sichuan Jingweida Technology Group Co., Ltd

地址: 四川省绵阳市高新区永兴镇工业园

ADD: Yongxing Industrial Park of High-tech Zone In Mianyang City, Sichuan Province

TEL: +86-816-2561202 FAX: +86-816-2562518

E-MAIL: myjwd@myjwd.com

WEB: www.myjwd.com





RECORD OF REVISION





四川经纬达科技集团有限公司

Sichuan Jingweida Technology Group Co., Ltd


A. MECHANICAL(unit:mm)

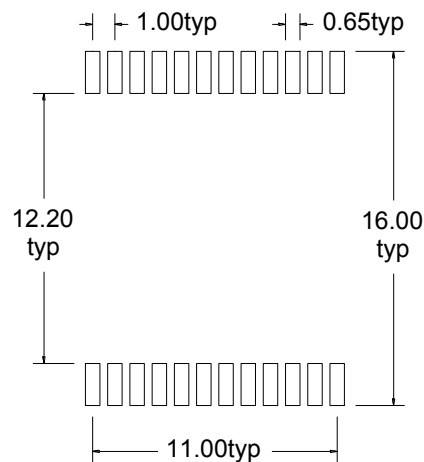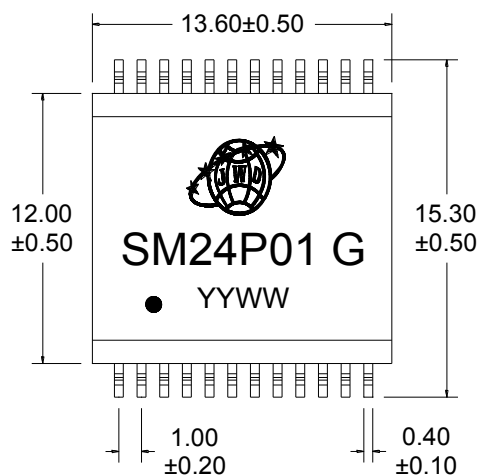

Suggested PAD Layout

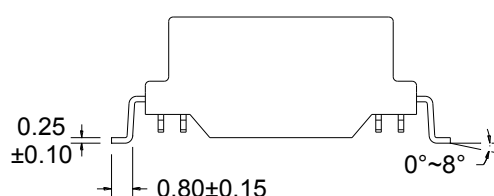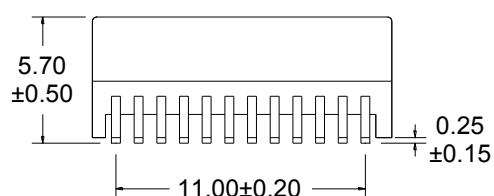

B. SCHEMATICS

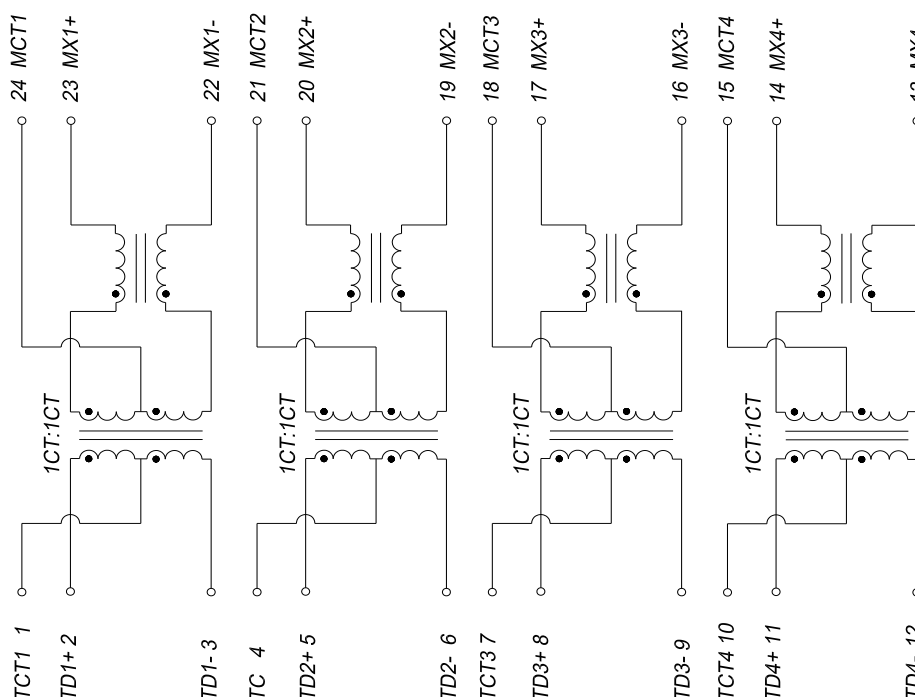

DESCRIPTION	JWD P/N	SPEC NO.	REV: R0
10G BASE-T	SM24P01 G	JWD-PAB-2960	PAGE: 2/5



四川经纬达科技集团有限公司

Sichuan Jingweida Technology Group Co., Ltd

C. ELECTRICAL SPECIFICATIONS @25°C

1. OCL: 120 uH Min @100KHz 100mV
2. Leakage Inductance: 0.5uH Max @ 100KHz, 0.1V
3. DCR: 900mΩ Max
4. Turns Ratio: 1CT:1CT±5%
5. Insertion Loss: -1.2dB max @ 1~200 MHz
-1.5dB max @ 200~300 MHz
-2.0dB max @ 300~400 MHz
-3.0dB max @ 400~500 MHz
6. Return Loss: -18 dB Min @ 1~100 MHz
-16 dB Min @ 100~200 MHz
-12 dB Min @ 200~300 MHz
-10 dB Min @ 300~400 MHz
-8 dB Min @ 400~500 MHz
7. Cross Talk: -25 dB Typ @ 1-500 MHz
8. Common Mode Rejection: -25 dB Typ @ 1-500 MHz
9. Isolation Hipot: 1500VAC 1mA 60S
10. Operating temperature 0°C to +70°C
11. Storage temperature -20°C to +125°C




DESCRIPTION	JWD P/N	SPEC NO.	REV: R0
10G BASE-T	SM24P01 G	JWD-PAB-2960	PAGE: 3/5




四川经纬达科技集团有限公司

Sichuan Jingweida Technology Group Co., Ltd


D. PACKAGE INFORMATION

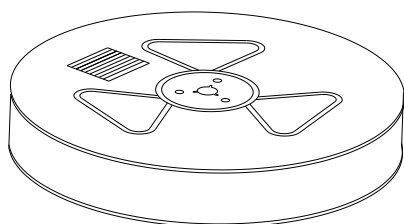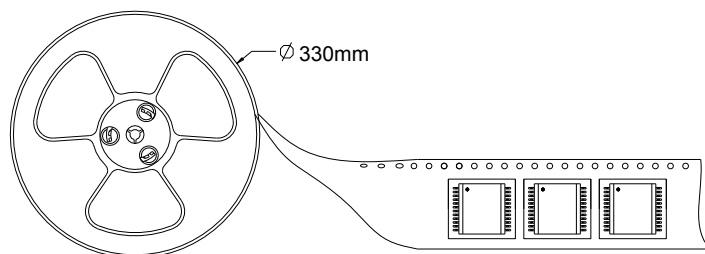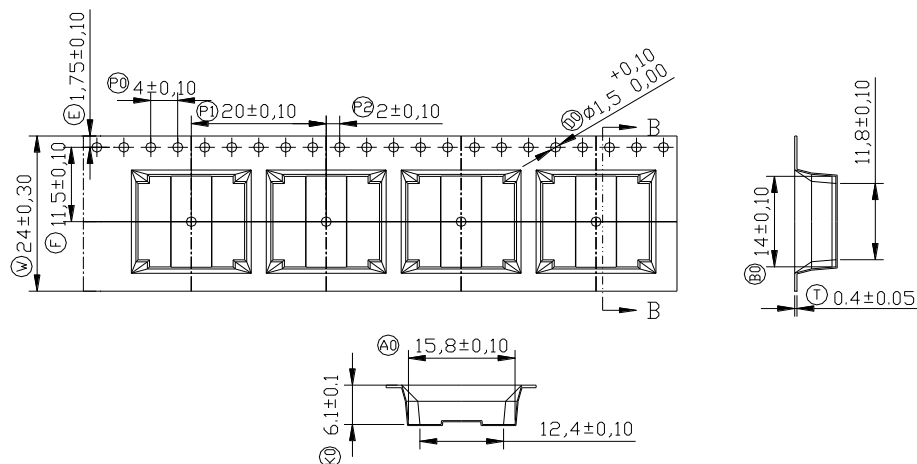


two reel

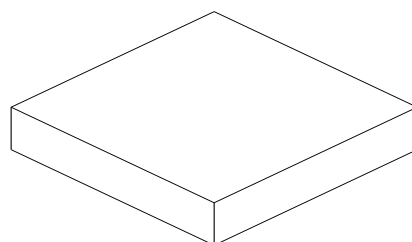

Inner Carton

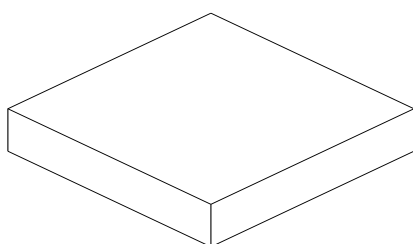

five Inner Carton

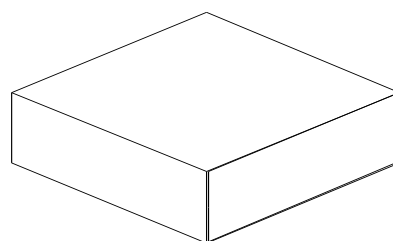

Export Carton

Package Quantity:

One Reel=450Pcs

One Inner Carton=450*2=900Pcs

One Export Carton=900*5=4500Pcs


DESCRIPTION	JWD P/N	SPEC NO.	REV: R0
10G BASE-T	SM24P01 G	JWD-PAB-2960	PAGE: 4/5



四川经纬达科技集团有限公司

Sichuan Jingweida Technology Group Co., Ltd

E. RECOMMEND REFLOW SOLDERING CURVE

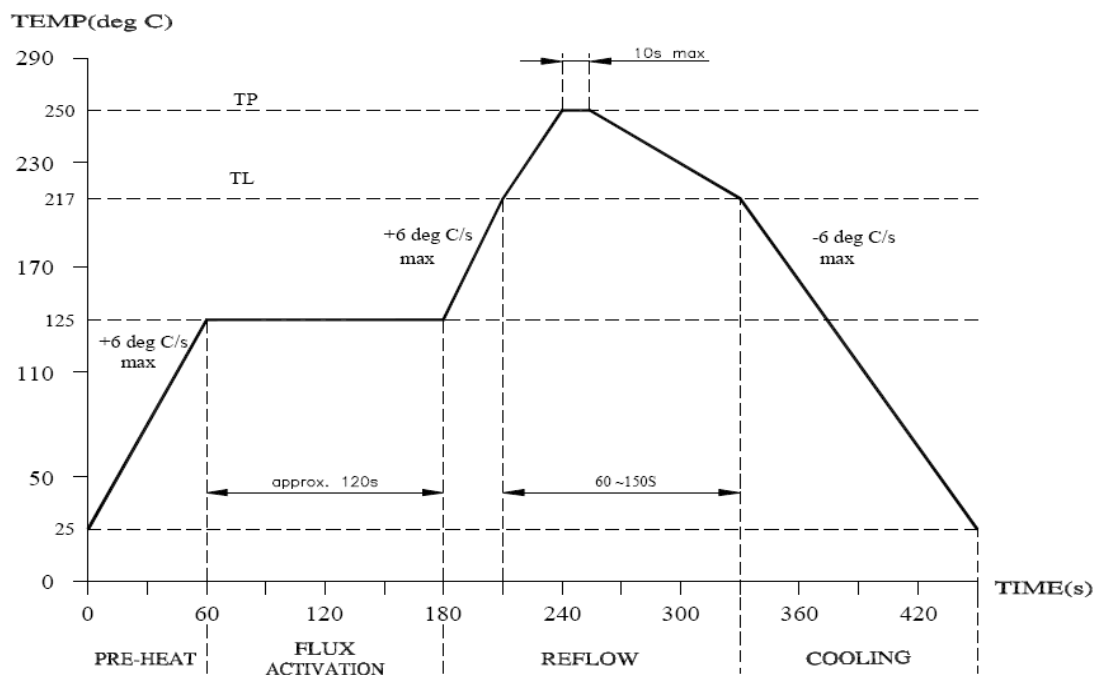

DESCRIPTION	JWD P/N	SPEC NO.	REV: R0
10G BASE-T	SM24P01 G	JWD-PAB-2960	PAGE: 5/5