

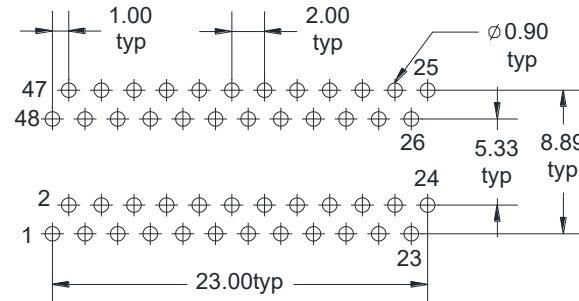
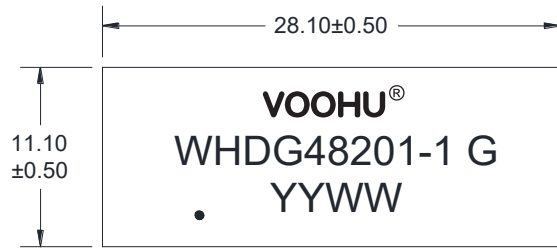



A. MECHANICAL(unit:mm)

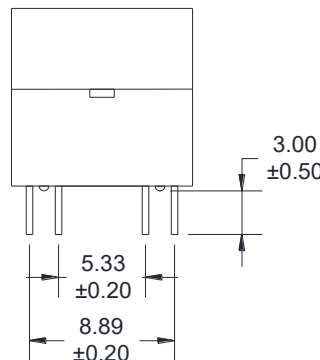

Suggestde PAD Layout

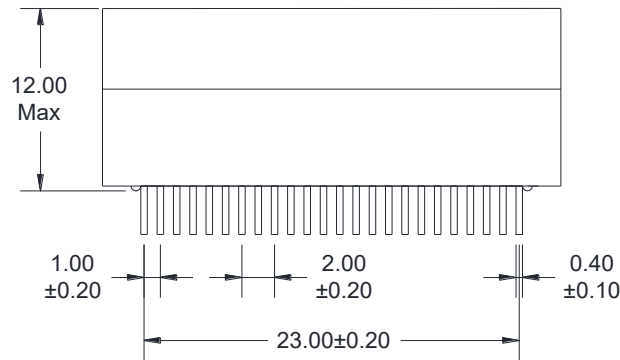

B. SCHEMATICS

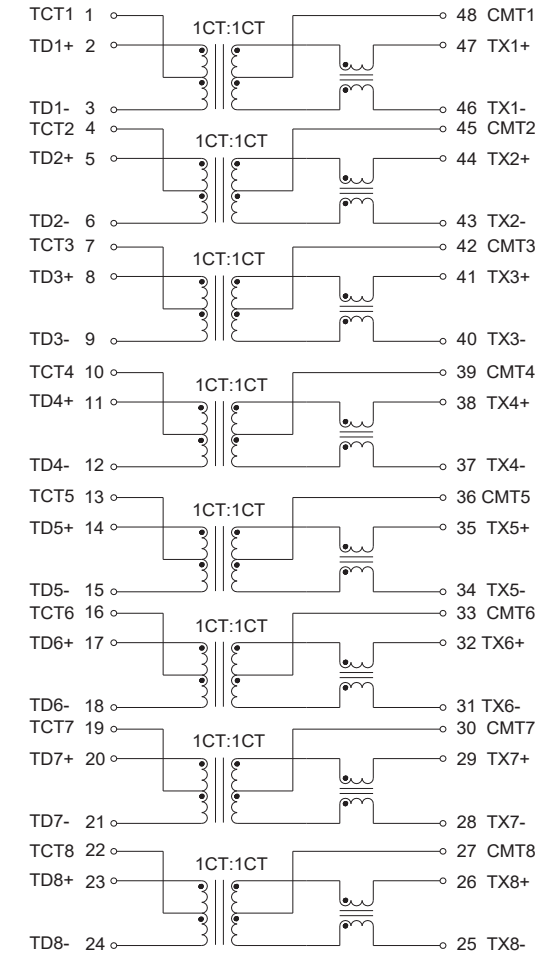

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TITLE:
100/1000 BASE-T

SIZE
A4

UNITS
MM[INCH]

GENERAL TOLERANCES
UNLESS SPECIFIED

APPROVED BY:
Geoffrey.Song

PART NO.:
WHDG48201-1 G

SACLE
1:1

REV
A0

x±0.35
.x±0.30
.xx±0.25
.xxx±0.10

x°±3.0°
.x°±2.0°
.xx°±1.5°
.xxx°±1.0°

CHECKED BY:
Elvis.Song


DESIGND BY:
Sunny.Xu

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM

REMARK:


SHEET
1/2




C. ELECTRICAL SPECIFICATIONS @25°C

- 1. OCL: 350 uH Min @ 100KHz, 0.1V 8mA DC BIAS
- 2. Leakage Inductance: 0.5 uH Max @ 100KHz, 0.1V
- 3. DCR: 1400 mΩ Max
- 4. Turns Ratio: 1CT:1CT±5%
- 5. Insertion Loss: -1.1 dB Max @ 1-100 MHz
- 6. Return Loss: -18 dB Min @ 1-30 MHz
 - 14.4 dB Min @ 40 MHz
 - 13.1 dB Min @ 50 MHz
 - 12 dB Min @ 60-80 MHz
 - 10 dB Min @ 100 MHz
- 7. Cross Talk: -30 dB Min @ 1-100 MHz
- 8. Common Mode Rejection: -30 dB Min @ 1-100 MHz
- 9. Isolation Hipot: 1500VAC 1mA 60S
- 10. Operating temperature 0°C to +70°C
- 11. Storage temperature -40°C to +85°C

D. PACKAGE INFORMATION

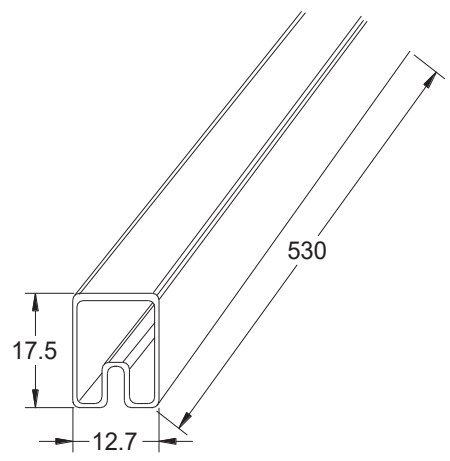

Tube: 530*12.7*17.5mm

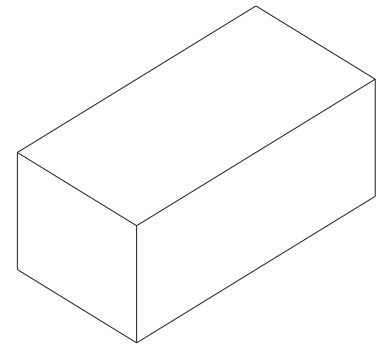


Inner Carton: L570*W180*H100mm

Package Quantity:

One Tube=18Pcs

One Inner Carton=18*50=900Pcs


One Export Carton=900*4=3600Pcs

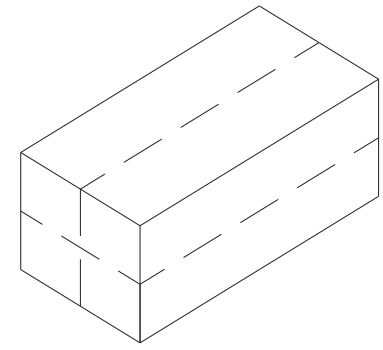

Export Carton: L580*W380*H240mm



苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TITLE: 100/1000 BASE-T	SIZE A4	UNITS MM[INCH]	GENERAL TOLERANCES UNLESS SPECIFIED		APPROVED BY: Geoffrey.Song
PART NO.: WHDG48201-1 G	SACLE 1:1	REV A0	x±0.35	x°±3.0°	CHECKED BY: Elvis.Song
			.x±0.30	.x°±2.0°	
REMARK:	SHEET 2/2		.xx±0.25	.xx°±1.5°	DESIGND BY: Sunny.Xu
			.xxx±0.10	.xxx°±1.0°	

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM