

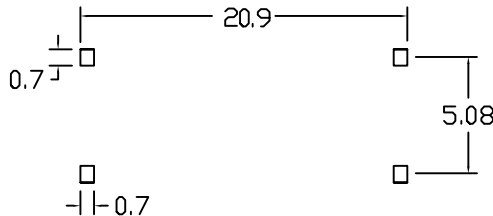
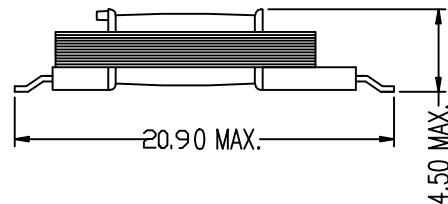
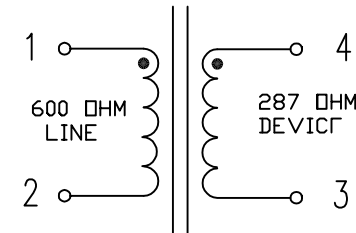
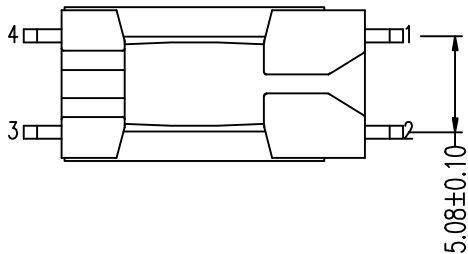


1.Electric Characteristic& Dimensions(电气特性及尺寸) unit:mm

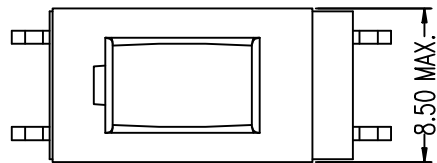

- ELECTRICAL CHARATERISTICS:
- DCR:
 - PIN1-2=155 OHM $\pm 10\%$
 - PIN3-4=144 OHM $\pm 10\%$
 - INDUCTANCE:@1KHz,1Vrms LP
 - PIN1-2=3H MIN
 - INSERTION LOSS:
 - (@1KHz,0dB,PIN3-4 W/H287 OHM
 - PIN1-2=3.5dB MAX
 - FREQ RESP(REF,1KHz):
 - @200Hz-4KHz= ± 0.3 dB
 - RETURN LOSS(REF,600 OHM):
 - @200Hz-4KHz=20dB MIN
 - TURN RATIO:15KHz,1Vrms
 - PIN1-2:4-3= $1\pm 2\%$
 - T.H.D<@600Hz,-10dBm):
 - 82dB MAX
 - HI-POT:
 - 1650VAC 1mA 2SEC:P-S
 - ROHS COMPLIANT

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM

TITLE:
DRAWING

PART NO.:
WHTT4203

REMARK:


SIZE
A4

SACLE
1:1

SHEET
1/1

UNITS
MM[INCH]

REV
A0



GENERAL TOLERANCES
UNLESS SPECIFIED

$x\pm 0.35$	$x^{\circ}\pm 3.0^{\circ}$
$.x\pm 0.30$	$.x^{\circ}\pm 2.0^{\circ}$
$.xx\pm 0.25$	$.xx^{\circ}\pm 1.5^{\circ}$
$.xxx\pm 0.10$	$.xxx^{\circ}\pm 1.0^{\circ}$

APPROVED BY:
Geoffrey.Song

CHECKED BY:
Elvis.Song

DESIGND BY:
Sunny.Xu