




REACH & RoHS
COMPLIANT

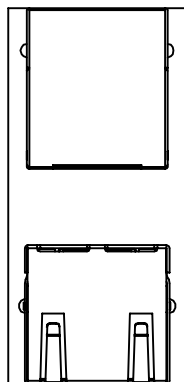


TOP VIEW

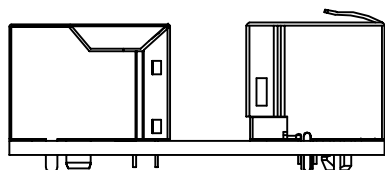



LEFT SIDE VIEW




FRONT VIEW

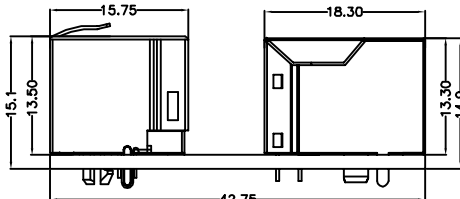

RIGHT SIDE VIEW

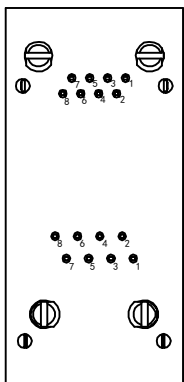

BOTTOM VIEW

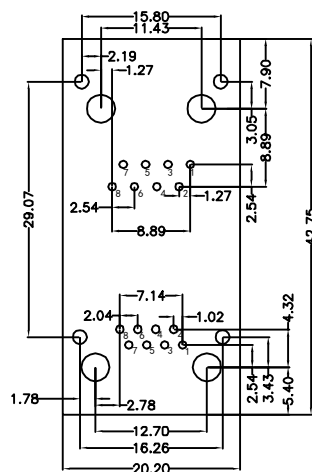

RECOMMENDED PCB LAYOUT
VIEWED FROM COMPONENT SIDE

MATERIAL:


HOUSING: PBT,UL94V-0,BLACK.
TERMINAL: PHOSPHOR BRONZE T=0.35MM,
50U" GOLD PLATING ON CONTACT AREA.
SHIELD: C2680,T=0.20MM,20U" MIN NICKEL PLATING
ON ALL AREA.

MACHANICAL:

DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.
INSERTION FORCE: 2.2KG.F MAX.
RETENTION STRENGTH : 7.7KG.F BETWEEN JACK AND PLUG.
OPERATING TEMPERATURE: -40℃~+85℃.
STORAGE TEMPERATURE: -40℃~+85℃.
ALL CRITICAL DIMENSIONS WITH "±"

ELECTRICAL:

VOLTAGE: 125 VOLTS AC.
CURRENT RATING : 1.5AMP.
DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1MIN.
INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL
AFTER 500V DC FOR 1 MINUTE.
CONTACT RESISTANCE: SINGLE TERMINAL 30 MILLIOHMS MAX.
INITIAL 50 MILLIOHMS MAX. AFTER
DURABILITY TEST.

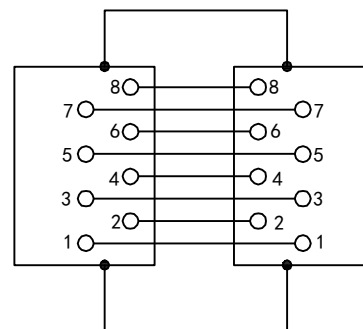

VOOHU 苏州沃虎电子科技有限公司
Su Zhou Voohu Electronic Tech.Co.Ltd

TITLE:

SYT-HB0001

PART NO.:

SYT-PCB003

REMARK:

SIZE

A4

SCALE

1:1

SHEET


1/1

UNITS

MM[INCH]

REV

A0



GENERAL TOLERANCES

UNLESS SPECIFIED

$x \pm 0.35$

$.x \pm 0.30$

$.xx \pm 0.25$

$.xxx \pm 0.10$

$x^\circ \pm 3.0^\circ$

$.x^\circ \pm 2.0^\circ$

$.xx^\circ \pm 1.5^\circ$

$.xxx^\circ \pm 1.0^\circ$

APPROVED BY:

Geoffrey.Song

CHECKED BY:

Elvis.Song

DESIGNED BY:

Sunny.Xu

TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM