
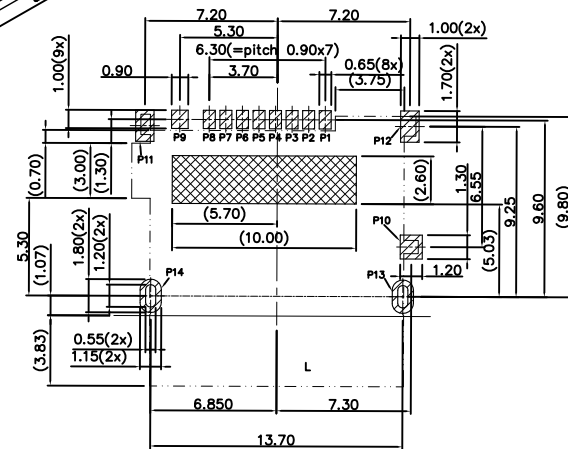
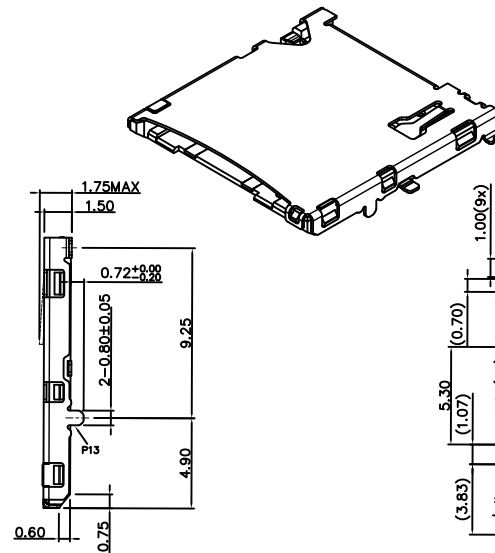


REACH & RoHS
COMPLIANT

* 所有原料材质, 生产制程, 电镀必须符合HF要求

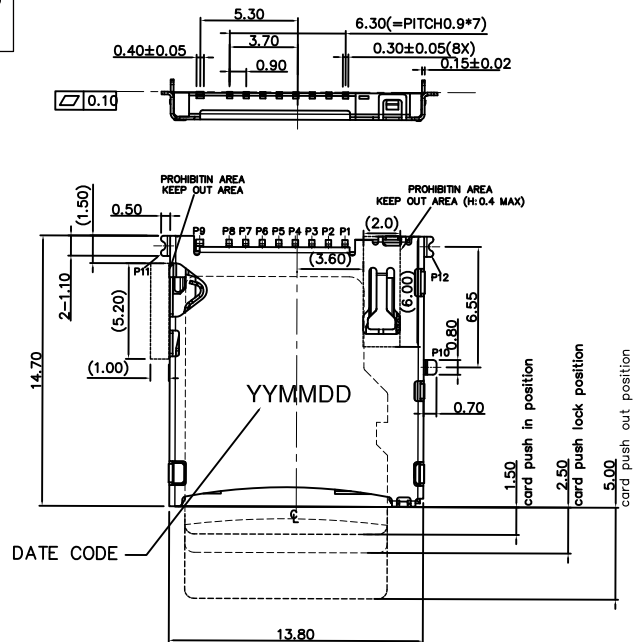


RECOMMENDED PCB LAYOUT(TOP VIEW)
GENERAL TOLERANCE: ± 0.05

 PAD AREA
 NO COPPER AREA
 KEEP OUT AREA

NOTES:

1. MATERIAL:
 - 1.1 PLASTIC: LCP , UL 94V-0, COLOR: BLACK
 - 1.2 CONTACT: COPPER ALLOY (C5210)
 - 1.3 SHELL: STAINLESS STEEL (SUS304)
2. FINISH:
 - 2.1 TERMINAL: 50u" MIN. NICKEL PLATED OVERALL
 - 2.2 CONTACT: Au 1u"
 - 2.3 TAIL: 100u" MATT-TIN PLATED
 - 2.4 SHELL: 50u" MIN. NICKEL PLATED OVERALL
3. PRODUCT MUST CONFORM TO RoHS AND HALOGEN FREE REQUIREMENT



DETAIL A
SCALE 5:1

PIN NUMBER	PIN DEFINE
PIN 1	MICRO SD_DAT2
PIN 2	MICRO SD_CD/DAT3
PIN 3	MICRO SD_CMD
PIN 4	MICRO SD_VDD
PIN 5	MICRO SD_CLK
PIN 6	MICRO SD_VSS
PIN 7	MICRO SD_DAT0
PIN 8	MICRO SD_DAT1
PIN 9	MICRO SD_CD
PIN 10	GND
PIN 11,12,13,14	GND

CARD DETECT SWITCH OPEN/CLOSE FOR
MICRO SD CARD POSITION

UN-INSERTION	CARD DERECT SWITCH
CARD UNINSERTION	OPEN
CARD HALF INSERTION	OPEN
CARD INSERTION	CLOSE
N/O	OPEN CLOSE



TEL: +86 400 1048 018

WEB: WWW.WOHU-TEK.COM

TITLE:
Micro SD PUSH H1.5(外壳无孔)

PART NO.:
WHMC150-T1250-21

REMARK:

SIZE
A4

SACLE
1:1

SHEET
1/1

UNITS
MM[INCH]REV
A0

GENERAL TOLERANCES
UNLESS SPECIFIED

	$x \pm 0.35$
	$.x \pm 0.30$
	$.xx \pm 0.25$
	$.xxx \pm 0.10$

TOLERANCES SPECIFIED	APPROVED BY: Geoffrey.Song
-------------------------	-------------------------------

$x^{\circ} \pm 3.0^{\circ}$	CHECKED BY: Elvis Song
$x^{\circ} \pm 2.0^{\circ}$	

.xx°±1.5°	DESIGND BY: Sunny.Xu
.xxx°±1.0°	

H

G

F

E

D

C

B

A